

# Soft-Lite™ Bay and Bow Window System

Design, Workmanship, and Performance: *Top of the Line*



## FOAM-FILLED MULLING CONNECTORS

Sag-Free Bracing System with  
Maximum Thermal Protection

## 1.25" FURNITURE-GRADE HARDWOOD VENEER

Compare v. 3/4" Systems  
(Shown with optional pre-stained surface)

## SOLID STEEL THREADED ROD

Sag-Free Bracing System  
with steel eyebolt



## SAG-FREE CABLE-FREE

Chained Bracing System

## 800 POUND


Working Load Limit  
per support!

## FOAM-FILLED WINDOW FRAME, SASHES

Superior Insulating Value  
and Sound Resistance

## MULL COVER PLATES

No butt-joints to caulk  
or leak

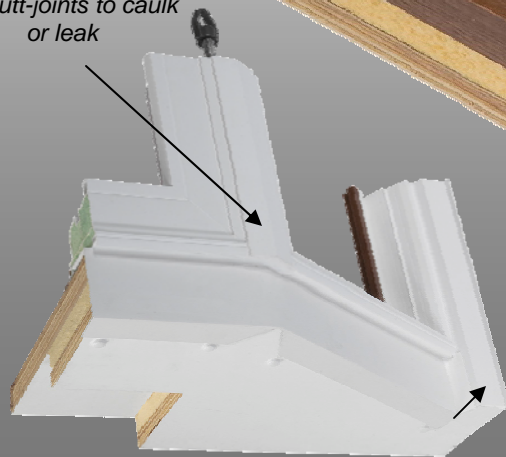

View of factory-capped underside; beautiful lines,  
consistent water shed

## EDGE BANDING

Eye appeal and protected  
exposed edges

OPTIONAL  
"Entire Seat" style:



DEFAULT:  
"Stop at the Jamb" style



# R-9

## Super Seat™ DOW® FOAM SANDWICH

Full 3" Thick with R-9 performance for Maximum  
Thermal Protection; fights Condensation